


Reno

ASSEMBLY INSTRUCTION

Smart Atelier* / Smart Verriere* / Smart Glasso*



* Make sure you have doors with the Smart hangers

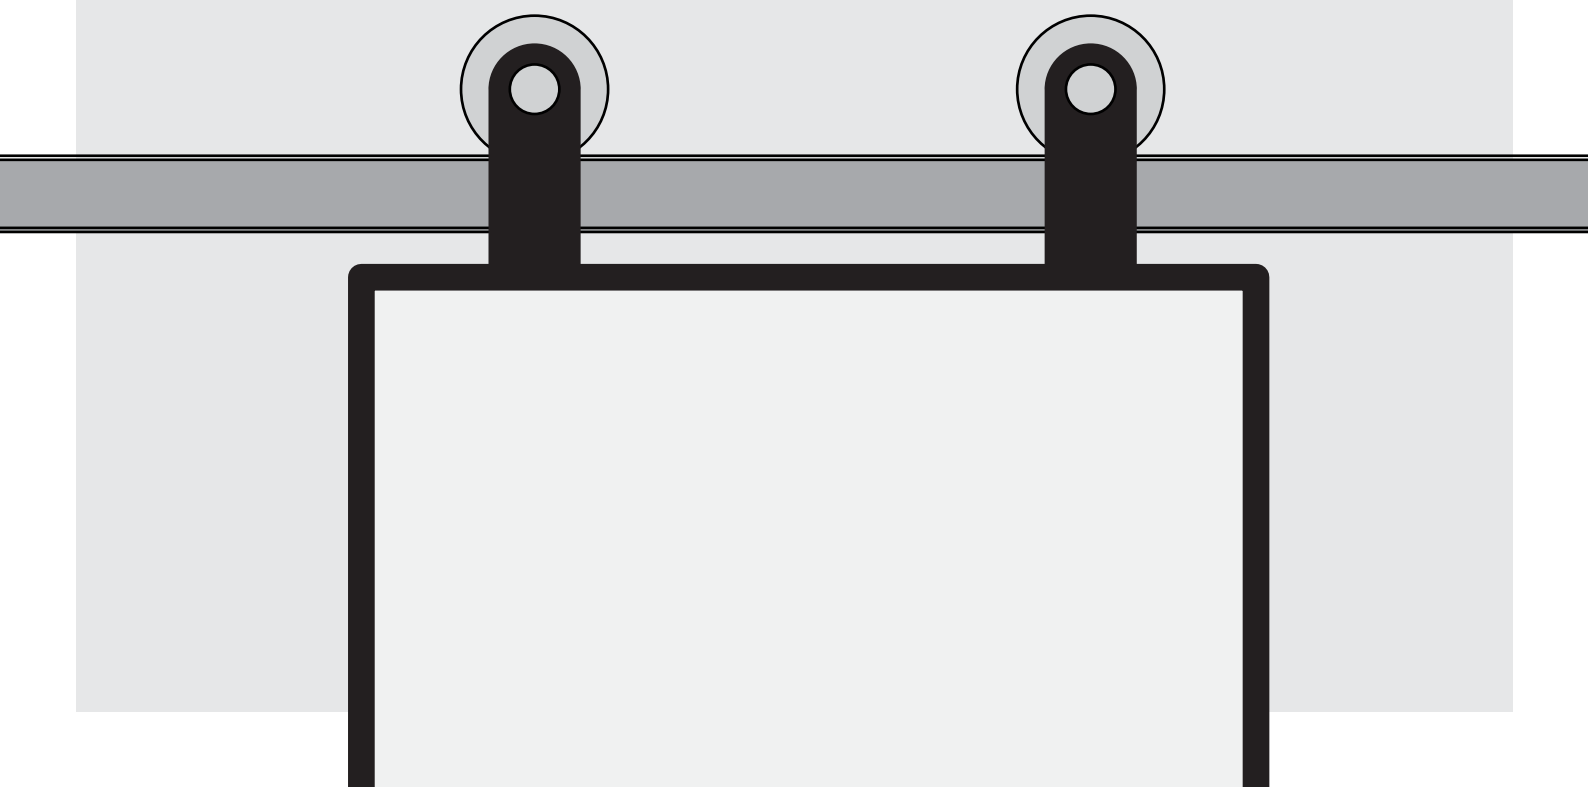

STRUCTURAL INFORMATION

For standard systems
for single and double (bi-parting) door




- 1 All Reno sliding systems require installation in the material to a thread depth of at least 6 cm. A wall or structure where the system will be mounted must be designed to support the weight specified for the system.

SYSTEM	DOOR WEIGHT LIMIT
Smart Atelier Smart Verriere Smart Glasso	up to 75 kg


- 2 Make sure that the door that will be mounted are made of solid construction material in places where hangers, bottom guide and door handles (if used) are installed.
- 3 Contact the contractor and / or local construction supervision authorities to confirm compliance with local building regulations.
- 4 For the best results and to ensure full compliance with local building regulations, look for qualified construction workers with knowledge on the properties of construction materials and building conditions.

MAIN ELEMENTS


RECOMMENDED TOOLS




tape measure




pencil




drill




level



socket wrench,
wrench




Allen keys /
flat cone wrench




2 people
recommended


ATTACHED PARTS (FOR SINGLE DOOR)




sliding track*
(base part)




sliding track*
(cover)




connector*




washer and
adjustment plate*




2 x cover cap
(version B)




wall plug*




spacer*




screw*




2 x trigger
(version A)




2 x trigger
(version B)



2 x bottom
guide



2 x Soft Close



screws for
Soft Close


* the number of screws/spacers/connectors/adjustment plates/track components will depend on the length of the track

INSTALLATION OF THE TRACK

Single door / Double (bi-parting) door

1 CONNECT THE TRACK BASE PARTS TOGETHER USING CONNECTORS


Place the connector on the front of the base part of the track, then secure it with the screws included in the kit. Connect, in the same way, all the base parts of the track together.

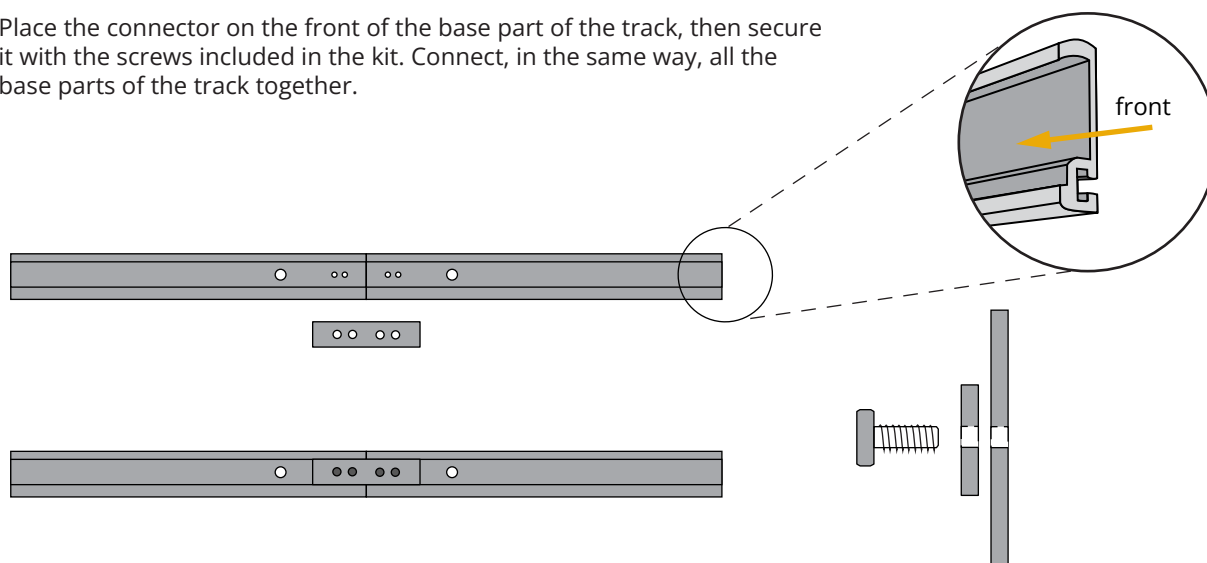


INSTALLATION OF THE TRACK

Single door / Double (bi-parting) door


2 DETERMINE THE POSITION OF THE TRACK

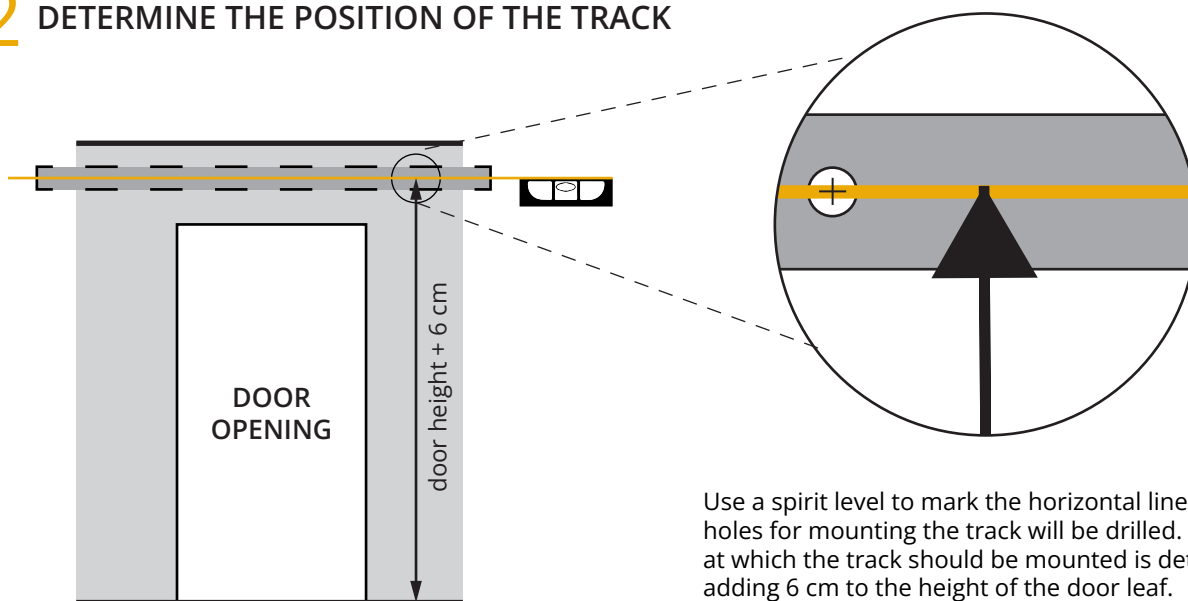

3 LOCATE THE MOUNTING POINTS - SINGLE DOOR

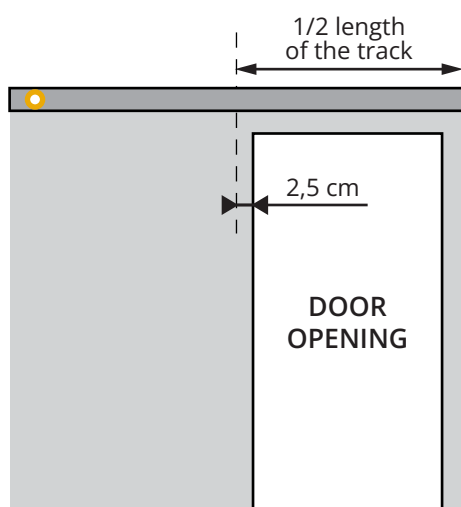

4 LOCATE THE MOUNTING POINTS - DOUBLE (BI-PARTING) DOOR


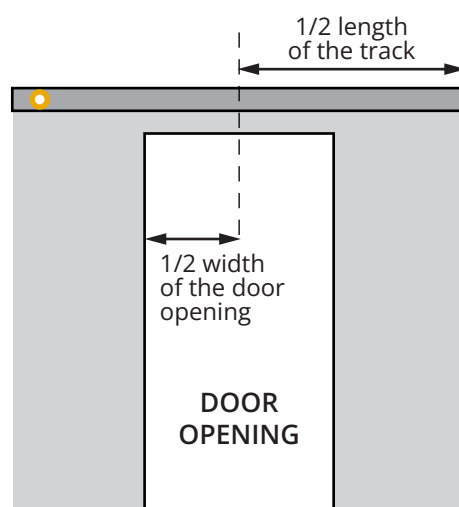


INSTALLATION OF THE TRACK


Single door / Double (bi-parting) door

5A ATTACH THE END OF THE TRACK AT THE FIRST MOUNTING POINT

Make sure the track is facing the right way. The side with the cutter should be facing down. Drill a hole in the wall, then loosely install one end of the track.

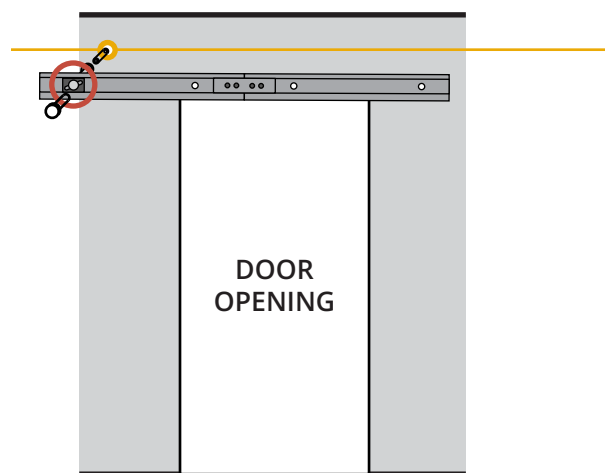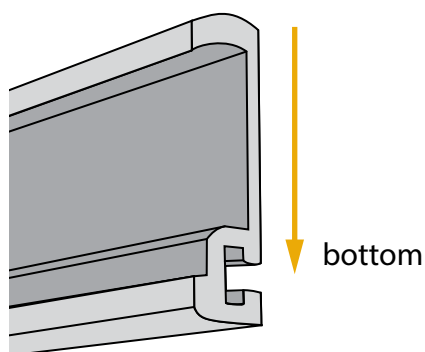

5B ATTACH THE END OF THE TRACK AT THE FIRST MOUNTING POINT

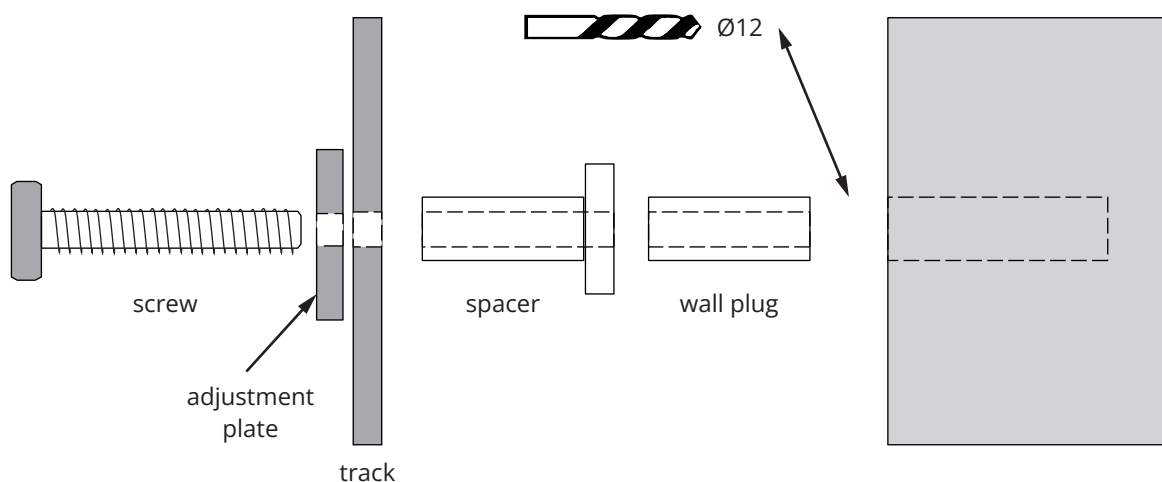


INSTALLATION OF THE TRACK

Single door / Double (bi-parting) door



6 LOCATE THE END MOUNTING POINT AND ATTACH THE TRACK

Move/lift the track to a horizontal position and locate the end mounting point. Drill a hole and loosely install the end of the track.

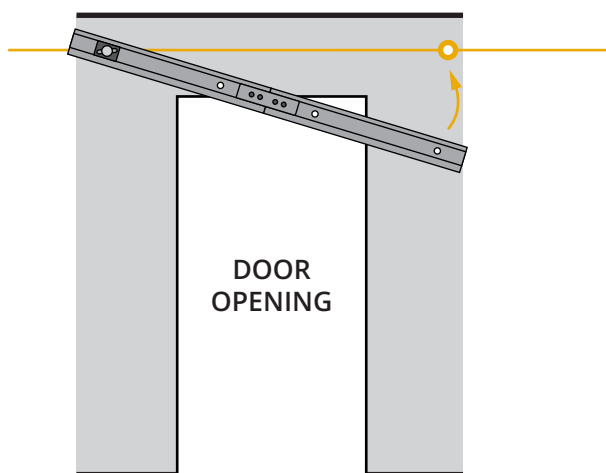

7 LOCATE AND DRILL THE CENTRE MOUNTING POINTS

Use a spirit level to make sure the track is level. Then locate the centre mounting points and drill holes into the wall through the track holes using a drill.

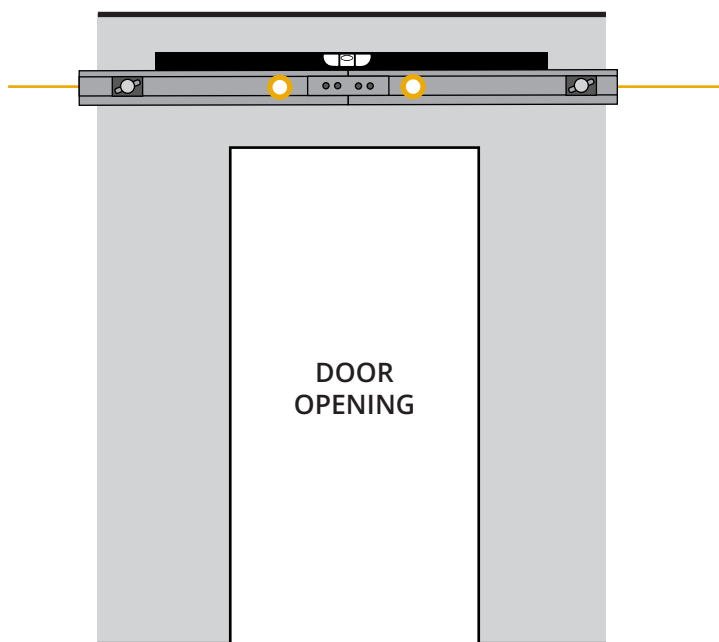
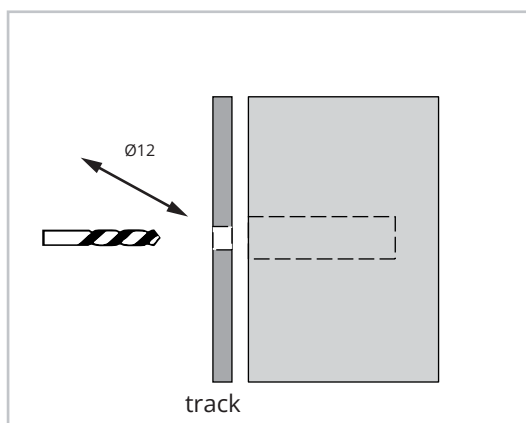


INSTALLATION OF THE TRACK

Single door / Double (bi-parting) door


8 INSTALL THE WALL PLUGS INTO THE CENTRE HOLES

Unscrew the end mounting point and lower the track. Install the wall plugs in all pre-drilled centre points.

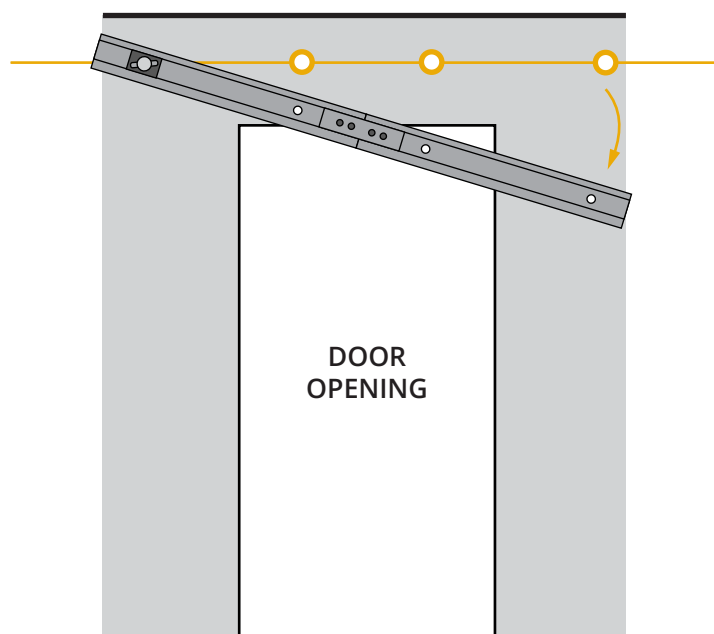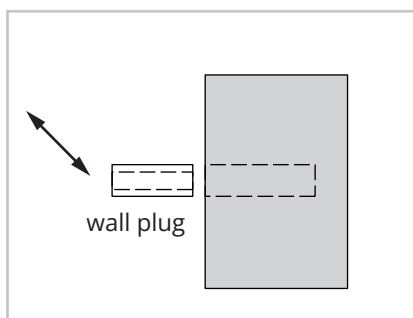

9A INSTALL ALL TRACK MOUNTING POINTS

Lift the track to the horizontal position again and loosely attach the end point of the track first, then the middle points.

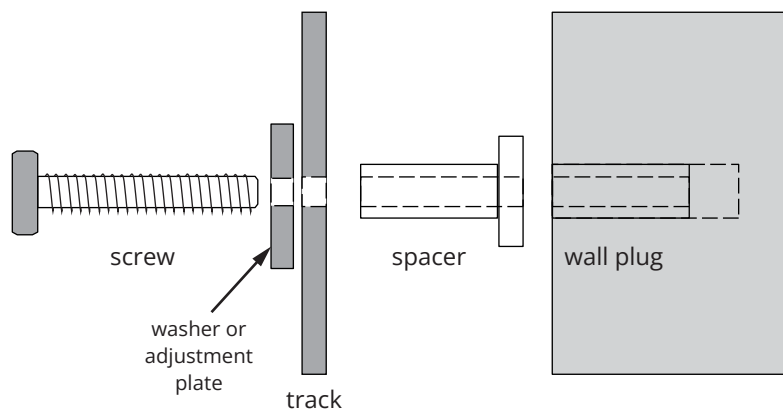


INSTALLATION OF THE TRACK

Single door / Double (bi-parting) door

9B INSTALL ALL TRACK MOUNTING POINTS

The adjustment plates are designed to be mounted on holes located at both ends of the track. On the remaining holes, washers should be placed.


In the case of longer tracks or tracks consisting of more than two parts, one plate is to be placed on each of the two ends of the track, and the remaining plates included in the set should be placed on the track holes, maintaining approximately equal distances between them. Washers should be placed on all other holes.



10 LEVEL AND ADJUST THE HEIGHT OF THE TRACK

Use the adjustment plates to set the track on the correct height. Adjust one end of the track first by positioning the plate and lightly tightening the screw. Then adjust the other end of the track, then the centre points one by one.


Use a level to make sure the track forms a horizontal line at the joints of the individual parts.

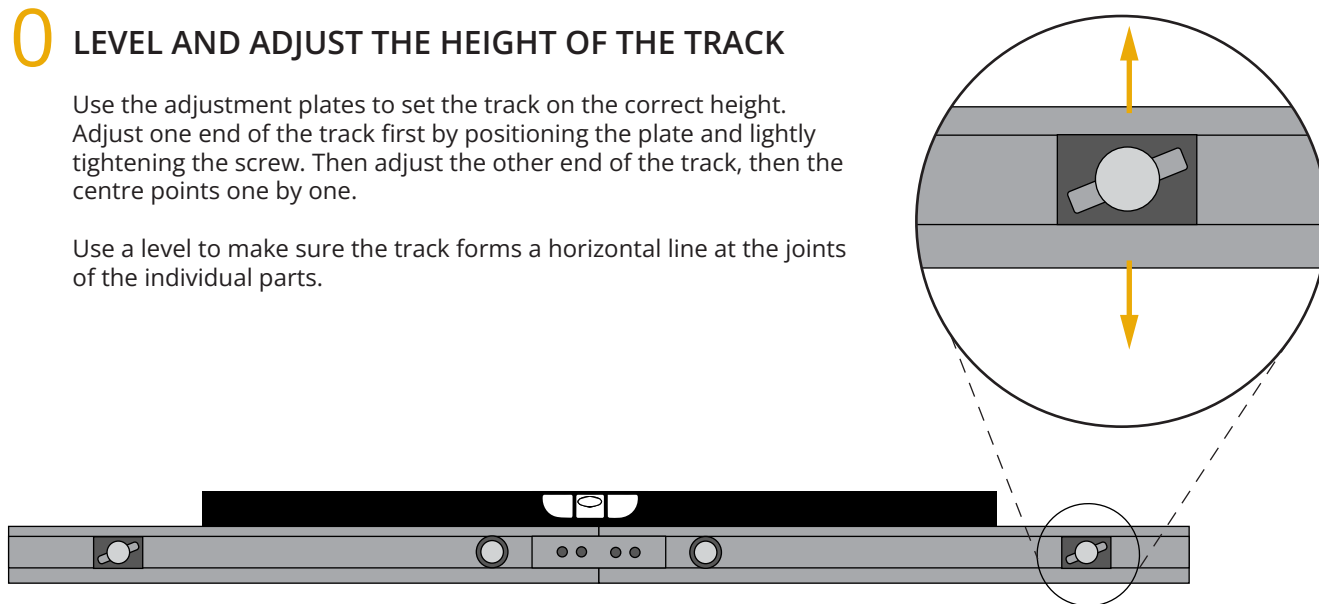


INSTALLATION OF THE SAFETY SET

Triggers

11 INSTALL THE TRIGGERS (VERSION B)

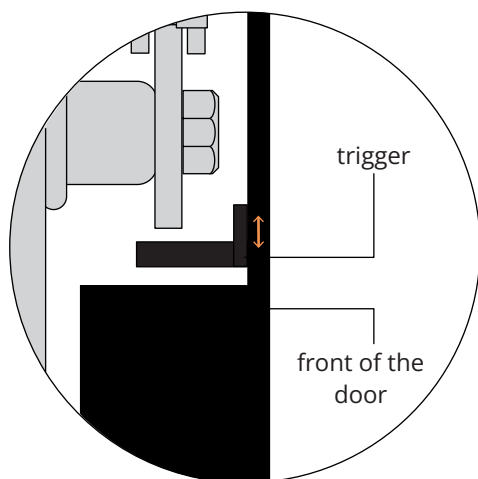


Install the triggers on the back of the hangers in the designated place. Lightly screw them in with screws, leaving the possibility of up and down adjustment. The holes in the triggers are elliptical, which makes it easier to adjust their position and mount the door on the track.

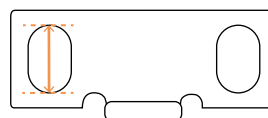


Tightening and final adjustment of the trigger will be performed after the door is hung.

INSTALLATION OF THE DOOR

12 INSTALL THE DOOR ON THE TRACK

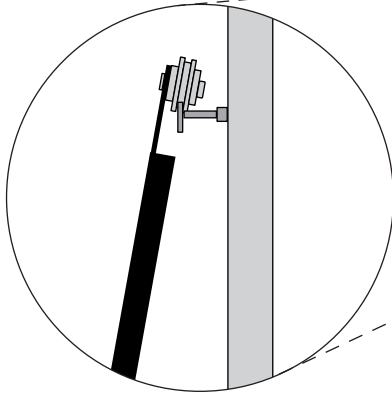


Lift the door at a slight angle (two people), then rest both wheel grooves onto the top of the track - as in the picture. Slowly lower the door to a vertical position.

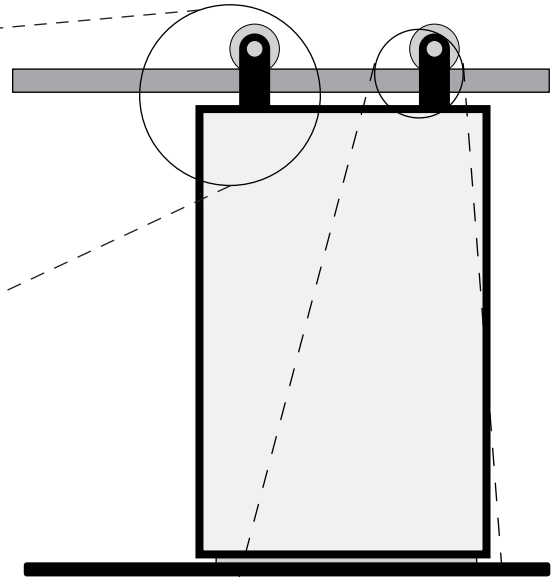

13 CHECK IF THE DOOR SLIDES SMOOTHLY


Check that the door slides smoothly along the track where the base parts join.

If necessary, remove the door. Slightly loosen the screws, then use the adjusting plates to even out any unevenness. Hang the door and make sure the door slides smoothly.

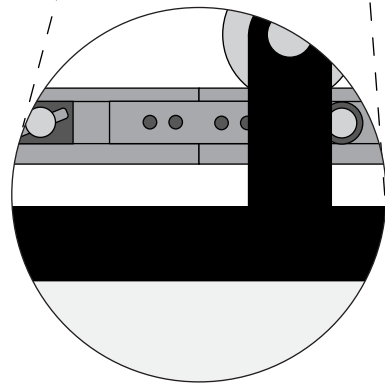

14 INSTALL THE TRACK COVER

After adjusting the level of the track, attach the covers by clicking them into the base part. To do this, first align the top edge of the cover with the top part of the base part, and then press the bottom edge of the cover.

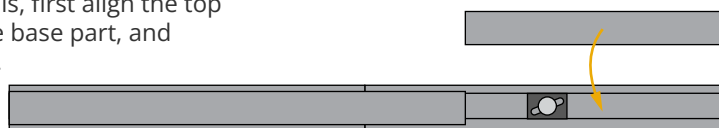


INSTALLATION OF THE DOOR

Hangers adjustment

15 HANGERS ADJUSTMENT - DOUBLE DOOR

If a gap between the doors is visible after hanging and moving the door to the closed position, adjust the hangers.


The hangers for double doors from the Industrial Line feature special eccentric screws for micro-adjustment. Gently turning the screw allows you to correct the door position.



Option 1. With two Allen keys


Use two size 5 Allen keys, one of which is designed for tight spaces (with a max. 1 cm handle length).

Place the keys on the screws on both sides of the roller. Turn both keys synchronously in the same direction to set the eccentric screw.

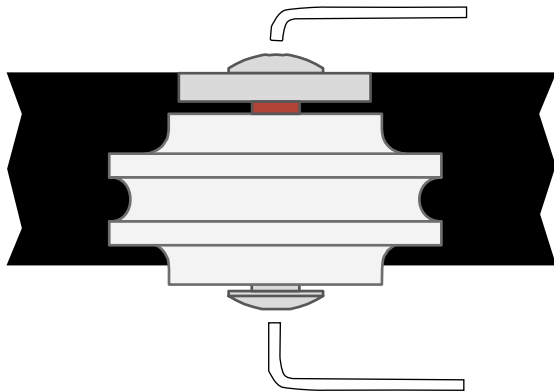

Option 2. With a flat cone wrench


Use a 14 mm, 2 mm thick flat wrench. Insert the wrench between the roller and the hanger and gently turn the wrench to adjust the eccentric screw.

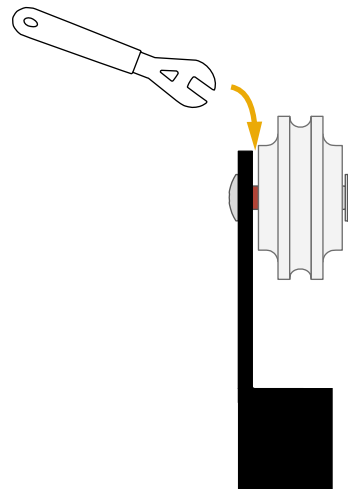

If necessary, remove the door from the track and adjust the screw.

INSTALLATION OF THE DOOR BOTTOM GUIDE


16 INSTALL BOTTOM GUIDE

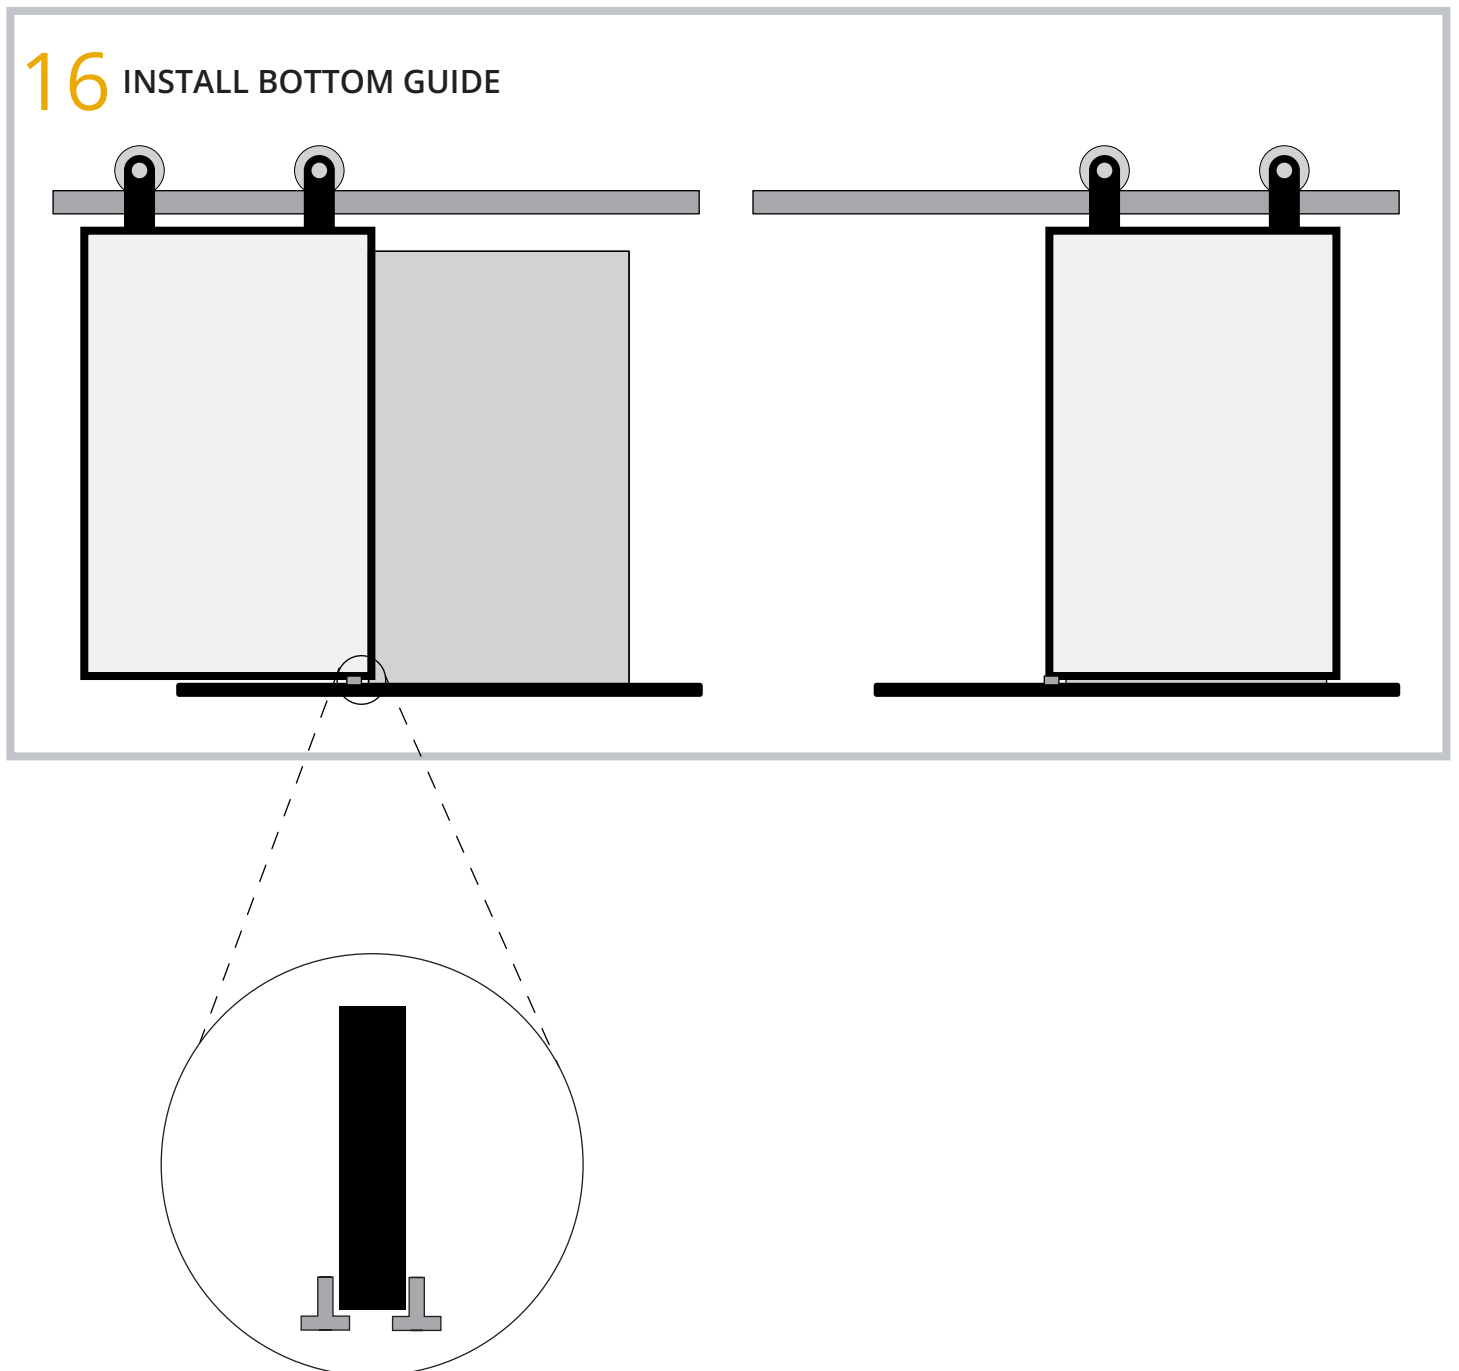

Install the bottom guide close to the edge of the door opening (about 0-1 cm from the edge), so that when the door is completely open or closed, the bottom guide will always be in the door line.

INSTALLATION OF THE SOFT CLOSE


17 PREPARE THE SOFT CLOSE FOR INSTALLATION

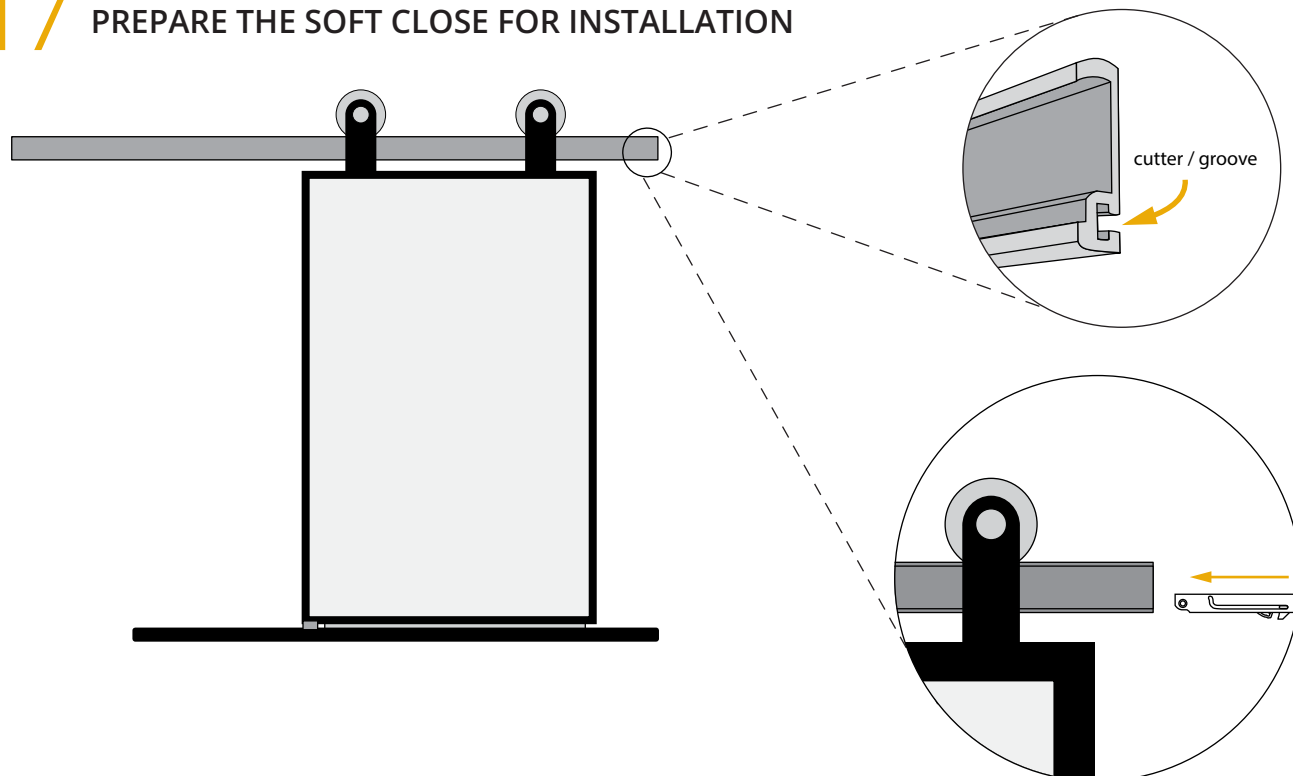

There is a special cutter on the back of the base part, adapted for installing the Soft Close and stoppers.



For single-leaf doors, place one Soft Close on each end of the track. This will allow the Soft Close mechanism to operate when opening and closing the door.

Prepare the Soft Close for installation. To do this, place the screws in the Soft Close holes and place the metal plates on the ends of the screws.

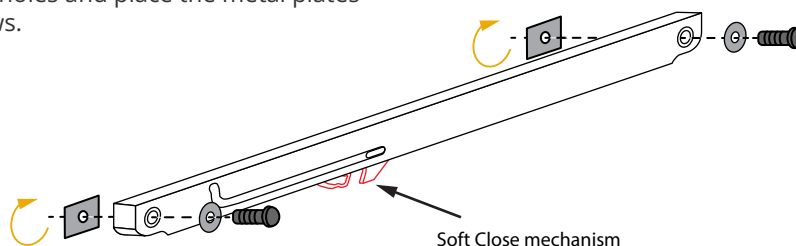

INSTALLATION OF THE SOFT CLOSE


18 INSTALL THE SOFT CLOSE ON THE TRACK

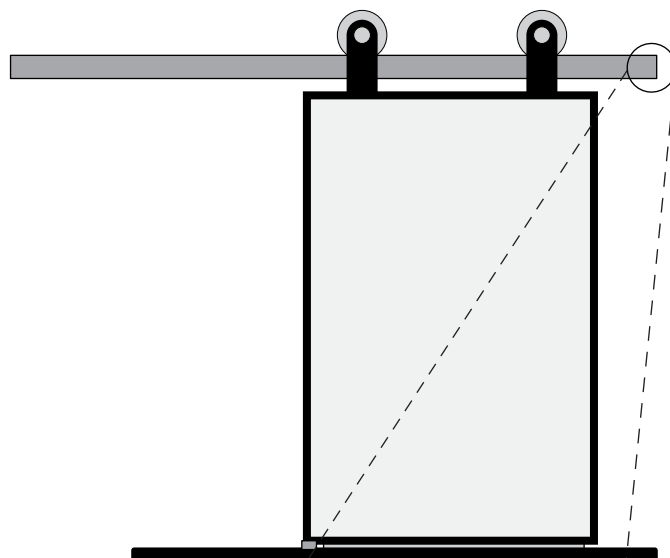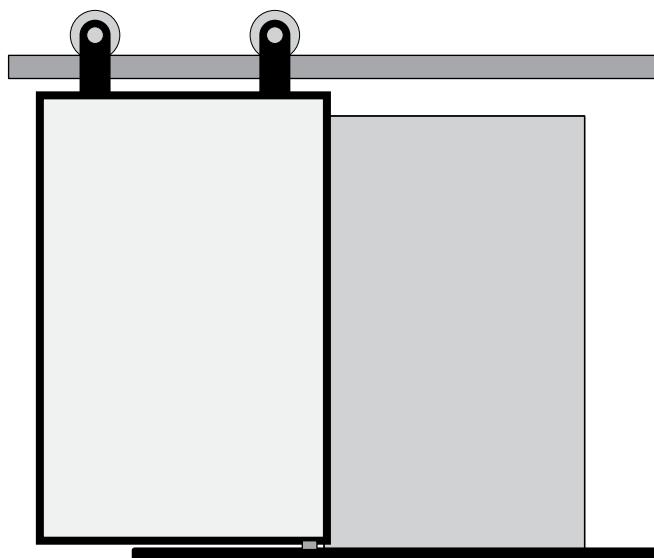

Slide the door to the fully closed position and locate the correct position of the Soft Close. The mechanism will be triggered by the anti-jump.

Place the Soft Close on the track, inserting the metal plates into the cutter. Adjust the position of the Soft Close, then tighten the screws to the track*.



Repeat for the fully open position.

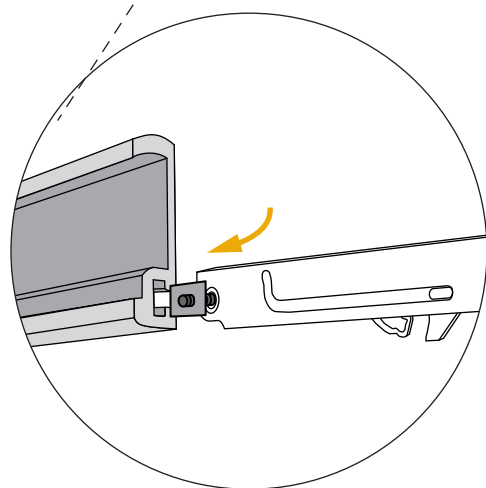

* When attaching the Soft Close, make sure not to overtighten the screw in the hole located at the Soft Close mechanism. Overtightening the screw will prevent the mechanism from moving all the way to the end of Soft Close body. This will make it difficult to fully open/close the door.

INSTALLATION OF THE SOFT CLOSE


19 INSTALL THE TRIGGERS ON THE DOOR

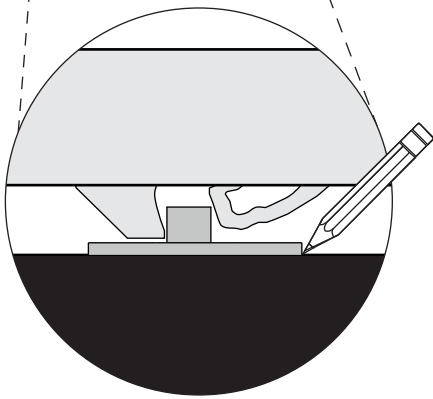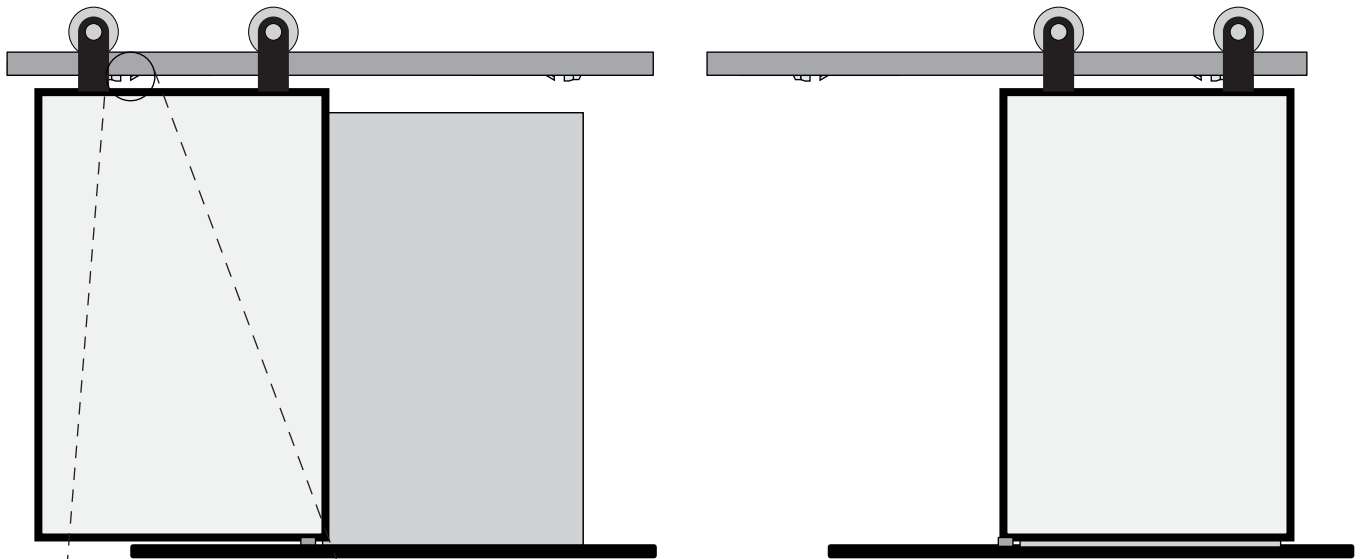

* Some frames may have pre-drilled holes where the triggers must be installed.

1. Slide the door to the fully open position.
2. Carefully mark the position for mounting the trigger. We recommend placing the trigger close to the end hanger, although the trigger can be placed anywhere on the part of the track where the door is fully open.
3. Take the door off and mount the trigger on the upper edge of the door at the previously marked point. Hang the door back on the track.
4. Adjust the position of the Soft Close using an Allen key. The trigger should fit exactly in the middle of the Soft Close mechanism.
5. Slide the door to the fully closed position and repeat steps 2-4 to mount the trigger on the other end of the track.


On the top of the door frame, near the hangers, pre-drill holes* for installing the trigger. Then screw the trigger in.

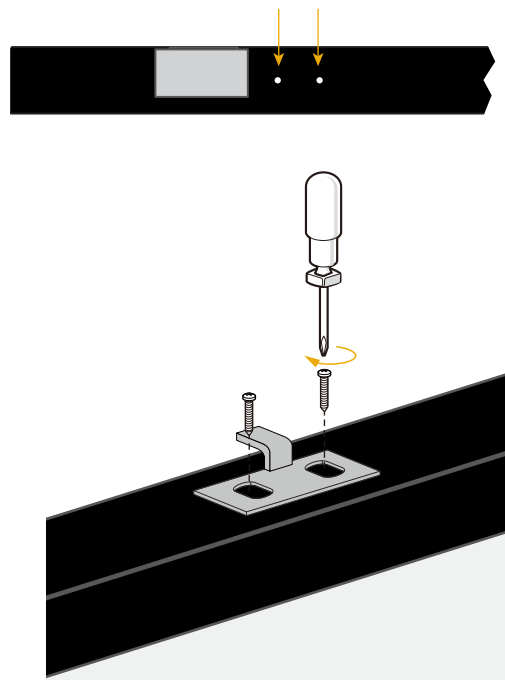

INSTALLATION OF THE SAFETY SET

Triggers

20 ADJUST THE POSITION OF THE TRIGGERS (VERSION B)

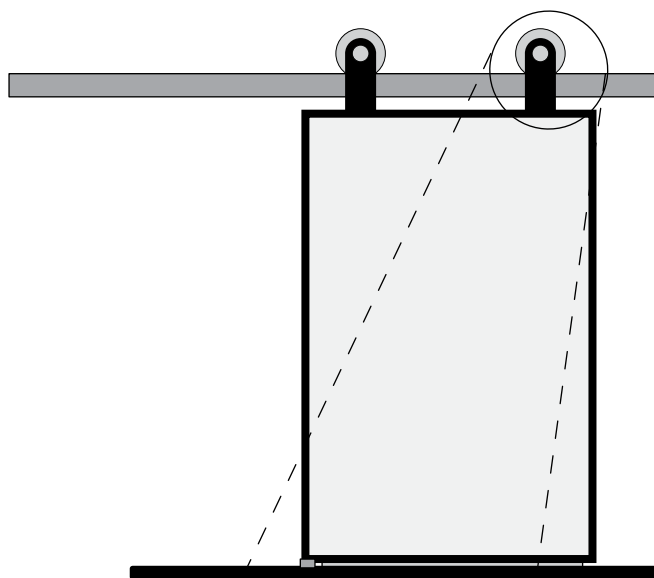


Move the triggers all the way up and tighten the screws securely.



Carefully slide the door to check that the trigger is properly engaged with the Soft Close mechanism. Also, make sure that the trigger is not rubbing against the track.


If necessary, loosen the screws and adjust the trigger position.


Triggers have several functions, so it is important to install them correctly. They prevent the door from falling off the track and serve as releases for the Soft Close.

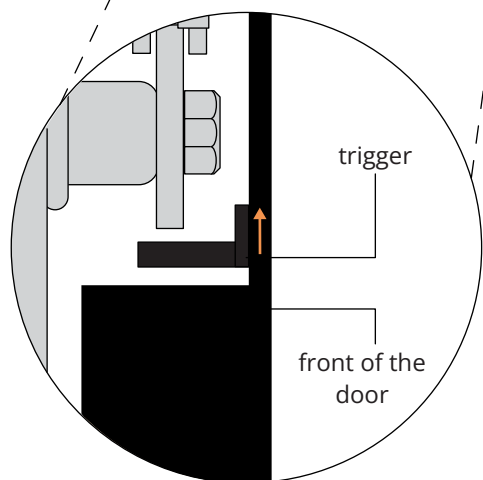

21 ATTACH THE COVER CAPS

Place the cover caps on both ends of the track and secure them with the screws provided.

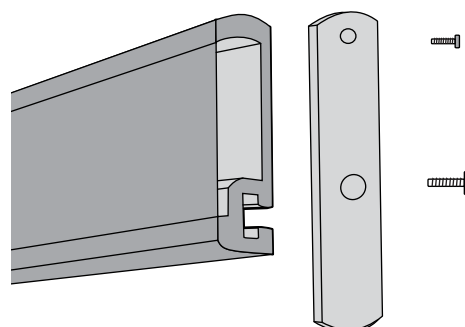

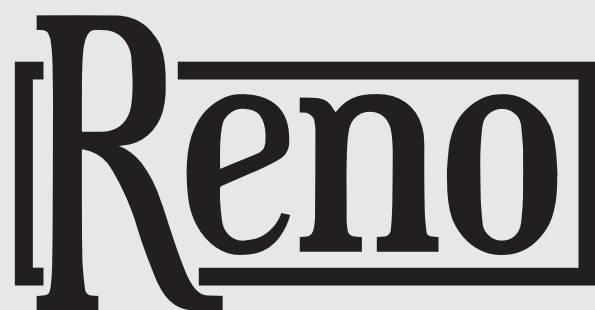

RENO Sp. z o. o.
Warsaw, Poland

support@renodoors.eu

www.renodoors.eu